arXiv:1702.05418v2 [physics.class-ph] 29 Mar 2017

UNUSUAL ELECTROMAGNETIC DISTURBANCES

Robert P Cameron*
School of Physics and Astronomy, University of Glasgow, Glasgow G12 8QQ, United Kingdom
(Dated: March 30, 2017)

We introduce unusual electromagnetic disturbances resembling rings, loops, links, globules, lines, knots, roses and clouds. Each of these is an exact solution of Maxwell's equations with looped electric and magnetic field lines of finite extent, a localised appearance in all *three* spatial dimensions and a monochromatic time dependence. The generation of our unusual electromagnetic disturbances in the laboratory is briefly considered and some possible directions for future research are highlighted.

I. INTRODUCTION

In the absence of charge the electric field $\mathbf{E}$ and magnetic field $\mathbf{B}$ obey Maxwell's equations in the form [1–5]

$$\boldsymbol{\nabla}\cdot\mathbf{E}=0, \tag{1}$$
$$\boldsymbol{\nabla}\cdot\mathbf{B}=0, \tag{2}$$
$$\boldsymbol{\nabla}\times\mathbf{E}=-\dot{\mathbf{B}} \tag{3}$$
$$\boldsymbol{\nabla}\times\mathbf{B}=\epsilon_0\mu_0\dot{\mathbf{E}}. \tag{4}$$

(1) together with the divergence theorem [6] states that the flux of the electric field through any closed surface is zero at any given time [4, 5], leaving two distinct possibilities: an electric field line must either extend indefinitely or else form a loop of finite extent.

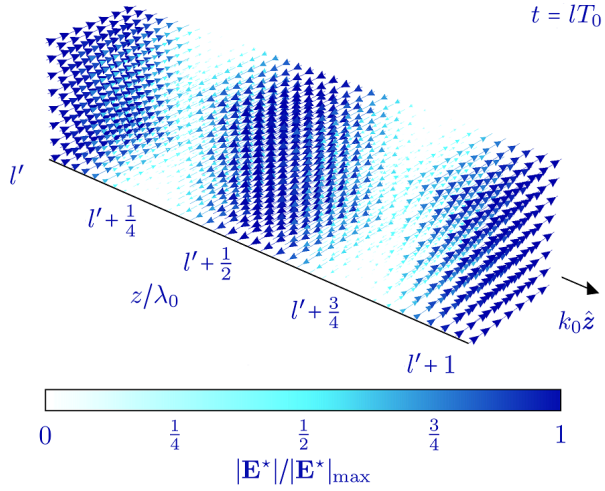

FIG. 1. The electric field $\mathbf{E}^\star=\hat{\boldsymbol{x}}E_0\cos(k_0z-\omega_0t)$ of a linearly polarised plane electromagnetic wave, depicted as a three-dimensional vector plot: each blue arrow represents an electric field vector; normalised, colour-coded and scaled by magnitude.

Electromagnetic disturbances with indefinitely extending electric field lines are well known: a plane electromagnetic wave is perhaps the clearest example. See FIG. 1. Electromagnetic disturbances with looped electric field lines of finite extent are less well understood: some forms have been introduced [7–24] but there remains much to be done. Indeed, many of the aforementioned works have focussed upon so-called electromagnetic knots [7, 8, 10–12, 14–22, 24]. The author's desire to help explore this avenue led to the somewhat broader investigation described in the present paper: unusual electromagnetic disturbances resembling rings, loops, links, globules, lines, knots, roses and clouds are introduced in §II; the generation of these disturbances in the laboratory is briefly considered in §III and some possible directions for future research are highlighted in §IV.

Let us emphasise that we are studying novel arrangements of the electric (and magnetic) field lines themselves: our focus is not upon threads of darkness [25–27] or polarisation singularities [28–31], for example. We centre our explicit discussions upon the electric field rather than the magnetic field as the electric field is often of greater importance when one comes to consider basic interactions between light and matter. Moreover, it is the looped character of the (free) electric field lines rather than magnetic field lines that is novel: $\boldsymbol{\nabla}\cdot\mathbf{E}\neq0$ in the presence of charge whereas $\boldsymbol{\nabla}\cdot\mathbf{B}=0$ in general, it seems [4, 5, 32]. As (1)-(4) place $\mathbf{B}$ on equal footing with $\mathbf{E}$, the electric and magnetic properties of a disturbance can nevertheless be interchanged by performing a duality transformation: $\mathbf{E}\to c\mathbf{B}$, $\mathbf{B}\to-\mathbf{E}/c$ [5, 33–36].

We use the following superscript labels to distinguish between our explicit solutions of (1)-(4):

LABEL	SOLUTION
$\star$	plane electromagnetic wave
A	electric ring (§II A)
B	electric loop (§II B)
C	electric link (§II C)
D	electric globule (§II D)
E1	curved electric line (§II E)
E2	straight electric line (§II E)
F	electric knot (§II F)
G	electromagnetic rose (§II G)
H	electromagnetic cloud (§II H)

and the superscript label LF to denote the radiation generated by our electric-ring antenna (§III). Magnetic versions of our electric ring, our electric loop, our electric link, our electric globule, our electric lines and our electric knot can be obtained via duality transformations.

* robert.cameron@glasgow.ac.uk

II. UNUSUAL ELECTROMAGNETIC DISTURBANCES

In the present section we introduce unusual electromagnetic disturbances resembling rings, loops, links, globules, lines, knots, roses and clouds. Let us highlight here some of their key features:

(i) Each of our unusual electromagnetic disturbances is an *exact* solution of (1)-(4) and can thus exist as an entity unto itself.

(ii) Each of our unusual electromagnetic disturbances has *looped* electric (and magnetic) field lines of *finite* extent. Our unusual electromagnetic disturbances are not merely regions of heightened electromagnetic energy density as in caustics, for example.

(iii) Each of our unusual electromagnetic disturbances appears well localised in all *three* spatial dimensions [37]. Our unusual electromagnetic disturbances are not propagating beams of structured light, for example. They might be thought of as exotic standing waves, in fact.

(iv) Each of our unusual electromagnetic disturbances is *monochromatic*. Our unusual electromagnetic disturbances are not electromagnetic pulses. Owing to the scale invariance of (1)-(4) [38], our unusual electromagnetic disturbances are valid in any region of the electromagnetic spectrum: they can be thought of equally in the radiowave domain [39] or the gamma-ray domain [40–42], for example.

Polychromatic unusual electromagnetic disturbances can also be constructed. Save for the discussions in §II I, we refrain from pursuing these further in the present paper, however.

To the best of the author's knowledge, electromagnetic disturbances akin to our electric loop (§II A), our electric link (§II C), our electric lines (§II E), our electric knot (§II F), our electromagnetic rose (§II G) and our electromagnetic cloud (§II H) have not been described before. The reader is invited to construct their own unusual electromagnetic disturbances and share them via the online repository at www.ytilarihc.com/ued.

Note that there is no obvious upper limit to the 'size' of an unusual electromagnetic disturbance: one is free to imagine an infrared [43–45] electromagnetic cloud as big as a *Stegosaurus* [46], or an x-ray [47] electric loop large enough to encircle a star, say. Explicit recipes for our unusual electromagnetic disturbances are given in Appendix A.

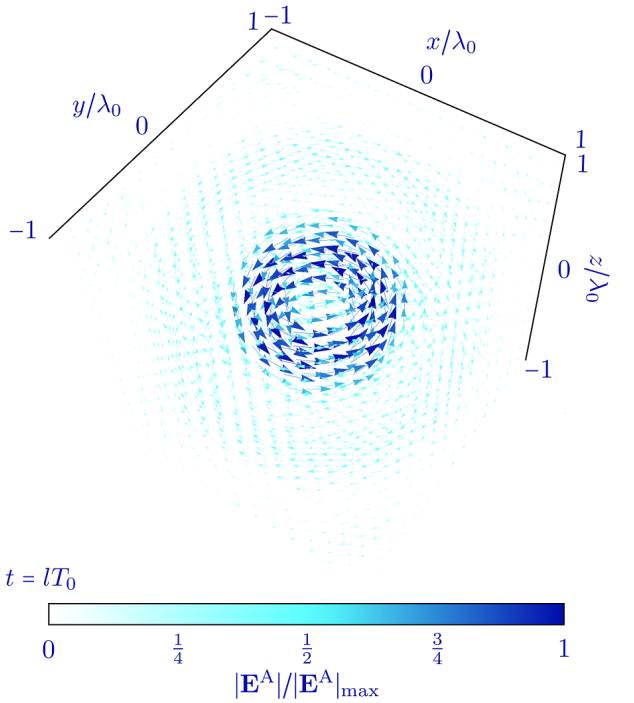

FIG. 2. The electric field of our electric ring.

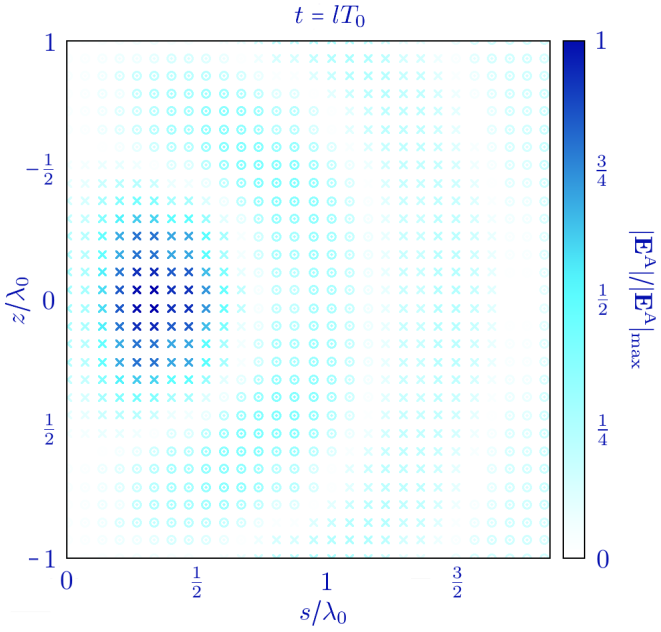

FIG. 3. The electric field of our electric ring, depicted as a two-dimensional vector plot: each blue cross ($\mathbf{E}^{\mathrm{A}} \cdot \hat{\boldsymbol{\phi}} > 0$) or circle ($\mathbf{E}^{\mathrm{A}} \cdot \hat{\boldsymbol{\phi}} < 0$) represents an electric field vector; normalised and colour-coded by magnitude.

A. Rings

Let us begin by introducing an unusual electromagnetic disturbance with electric properties that resemble a ring: our electric ring is constructed by superposing

plane electromagnetic waves propagating in every direction, each of equal angular frequency, equal amplitude, equal phase at the origin and with a linear polarisation parallel to the direction of varying azimuthal angle as specified in §A 1. Thus

$$\begin{aligned}\mathbf{E}^{\mathrm{A}} &= \Re\Bigg[\int_0^{2\pi}\int_0^{\pi}\frac{E_0}{2\pi\mathrm{i}}\left(-\sin\varphi\hat{\boldsymbol{x}}+\cos\varphi\hat{\boldsymbol{y}}\right)\\ &\quad\times \mathrm{e}^{\mathrm{i}k_0(\sin\vartheta\cos\varphi x+\sin\vartheta\sin\varphi y+\cos\vartheta z-ct)}\sin\vartheta\,\mathrm{d}\vartheta\mathrm{d}\varphi\Bigg] \quad (5)\\ &= \hat{\boldsymbol{\phi}} f E_0\cos(\omega_0 t)\end{aligned}$$

with

$$f = \int_0^{\pi}\mathrm{J}_1(\kappa s)\cos(k_z z)\sin\vartheta\,\mathrm{d}\vartheta \quad (6)$$

where $\kappa = k_0\sin\vartheta$ and $k_z = k_0\cos\vartheta$. In spite of its simplicity, this particular superposition of plane waves does not appear to have been described explicitly before. $\mathbf{E}^{\mathrm{A}}$ is depicted in FIG. 2 and FIG. 3. The magnetic properties of our electric ring are equivalent to the electric properties of our electric globule (§II D): $\mathbf{B}^{\mathrm{A}} = \mathbf{E}^{\mathrm{D}}/c$.

The electric field lines of our electric ring form loops of finite extent, as claimed: the electric field vectors are everywhere aligned with $\hat{\boldsymbol{\phi}}$. Our electric ring is seemingly well localised in all three spatial dimensions, as claimed: the maximum electric field strength is $(1.06\ldots)E_0$ and can be found at $s = 0.34\lambda_0$ and $z = 0$ when $t = lT_0$ whereas the second largest electric field strength is only $(0.28\ldots)E_0$ and can be found at $s = 0.97\lambda_0$ under the same conditions. Our electric ring is monochromatic, as claimed: $\mathbf{E}^{\mathrm{A}} \propto \cos(\omega_0 t)$.

Our electric ring is qualitatively similar to the electromagnetic disturbance described in [13] in that both exhibit azimuthally directed electric field vectors and are monochromatic. The two differ, however, in their spatial dependence and one might argue that the (central) ring of our electric ring is more pronounced than the analogous feature in [13]. See also [9].

B. Loops

Unusual electromagnetic disturbances with electric properties that resemble loops [48] of various forms can be constructed by superposing copies of our electric ring (§II A).

Shown in FIG. 4 for example is the electric field $\mathbf{E}^{\mathrm{B}}$ of the electric loop specified in §A 2. The area bounded by our electric loop is tiled with electric rings such that the electric fields of the rings largely cancel within the boundary of the loop whilst those on the loop connect. The formation of the loop is thus analogous to the formation of bound surface currents in magnetic media [4, 5].

Electric loops, including non-planar electric loops, can also be realised as closed electric lines (§II E).

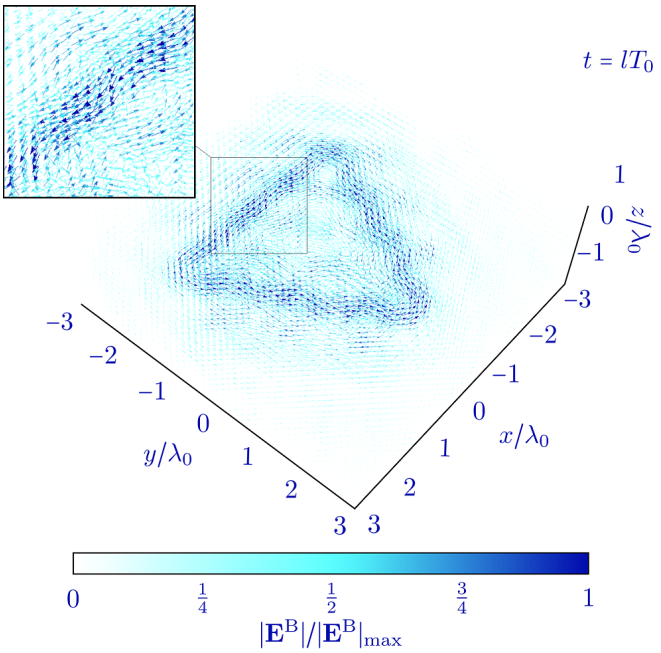

FIG. 4. The electric field of our electric loop.

C. Links

Unusual electromagnetic disturbances with electric properties that resemble links of various forms can be constructed by superposing electric loops (§II B).

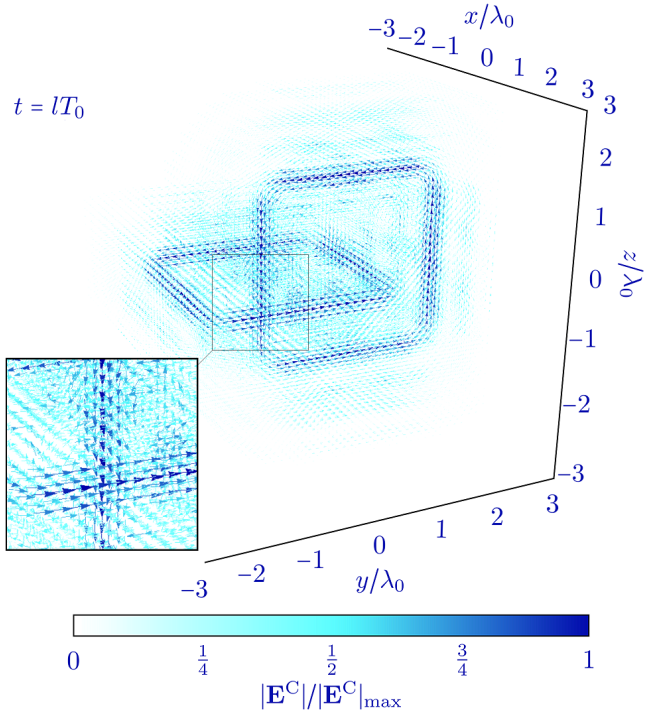

FIG. 5. The electric field of our electric link. Each of the electric rings comprising the link has been plotted for $|z_n| \leq \lambda_0$ only, for the sake of clarity.

Shown in FIG. 5 for example is the electric field $\mathbf{E}^{\mathrm{C}}$ of the electric link specified in §A 3. Our electric link is comprised of two square electric loops, suitably orientated and positioned.

D. Globules

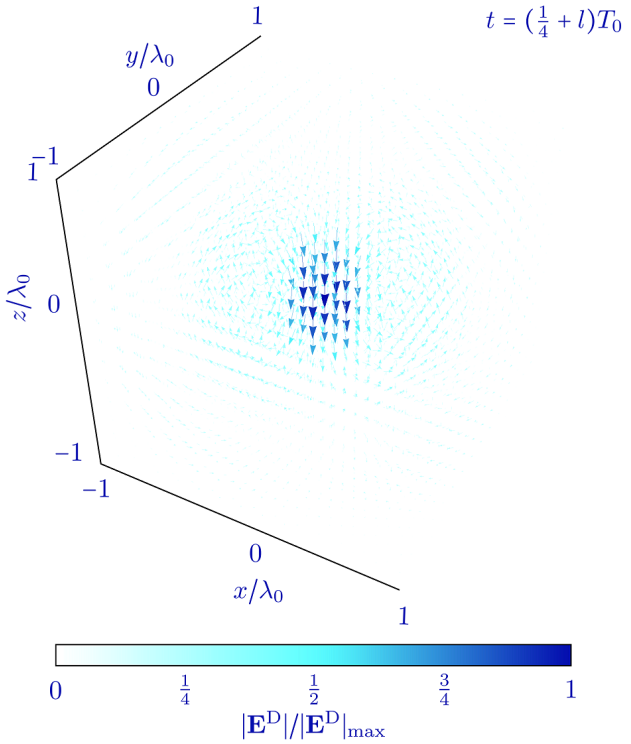

FIG. 6. The electric field of our electric globule.

We now introduce an unusual electromagnetic disturbance with electric properties that resemble a globule: our electric globule is similar in construction to our electric ring (§II A) except that each of its constituent plane waves is polarised parallel to the direction of varying polar rather than azimuthal angle as specified in §A 4. Thus

$$\mathbf{E}^{\mathrm{D}} = \Re\Bigg[\int_0^{2\pi}\!\!\int_0^{\pi} \frac{\mathrm{i}E_0}{2\pi} \left(\cos\vartheta\cos\varphi\hat{\boldsymbol{x}} + \cos\vartheta\sin\varphi\hat{\boldsymbol{y}} - \sin\vartheta\hat{\boldsymbol{z}}\right) \times \mathrm{e}^{\mathrm{i}k_0(\sin\vartheta\cos\varphi x + \sin\vartheta\sin\varphi y + \cos\vartheta z - ct)} \sin\vartheta \mathrm{d}\vartheta\mathrm{d}\varphi \Bigg] \tag{7}$$

$$= (\hat{\boldsymbol{s}}g + \hat{\boldsymbol{z}}h)\, E_0 \sin(\omega_0 t)$$

with

$$g = -\int_0^{\pi} \mathrm{J}_1(\kappa s)\sin(k_z z)\sin\vartheta\cos\vartheta\mathrm{d}\vartheta \tag{8}$$

$$h = -\int_0^{\pi} \mathrm{J}_0(\kappa s)\cos(k_z z)\sin^2\vartheta\mathrm{d}\vartheta. \tag{9}$$

In spite of its simplicity, this particular superposition of plane waves does not appear to have been described explicitly before. $\mathbf{E}^{\mathrm{D}}$ is depicted in FIG. 6 and FIG. 7. The magnetic properties of our electric globule are equivalent to the electric properties of our electric ring: $\mathbf{B}^{\mathrm{D}} = -\mathbf{E}^{\mathrm{A}}/c$.

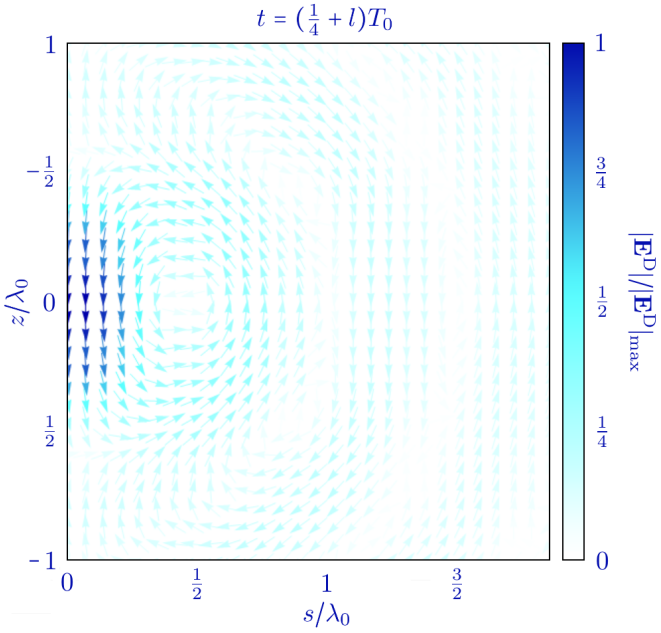

FIG. 7. The electric field of our electric globule, depicted as a two-dimensional vector plot: each blue arrow represents an electric field vector, normalised and colour-coded by magnitude.

The electric field lines of our electric globule wind in a toroidal fashion whilst clustering near the origin to give the disturbance its globular appearance: the maximum electric field strength is $(1.57\ldots)E_0$ and can be found at the origin when $t = (\frac{1}{4} + l)T_0$.

Our electric globule is qualitatively similar to a duality-transformed version of the electromagnetic disturbance described in [13]. See also [9].

E. Lines

Unusual electromagnetic disturbances with electric properties that resemble lines [48] of various forms can be constructed by superposing copies of our electric globule (§II D).

Shown in FIG. 8 for example is the electric field $\mathbf{E}^{\mathrm{E1}}$ of the curved electric line specified in §A 5. The S-shaped curve underlying our curved electric line is populated with electric globules much as a string might be populated with beads, the globules being orientated and translated such that the electric field vectors near the origin of each globule are essentially tangential with the curve and the line has a continuous appearance. Shown in FIG. 9 for example is the electric field $\mathbf{E}^{\mathrm{E2}}$ of the straight electric line specified in §A 5, which is similarly constructed.

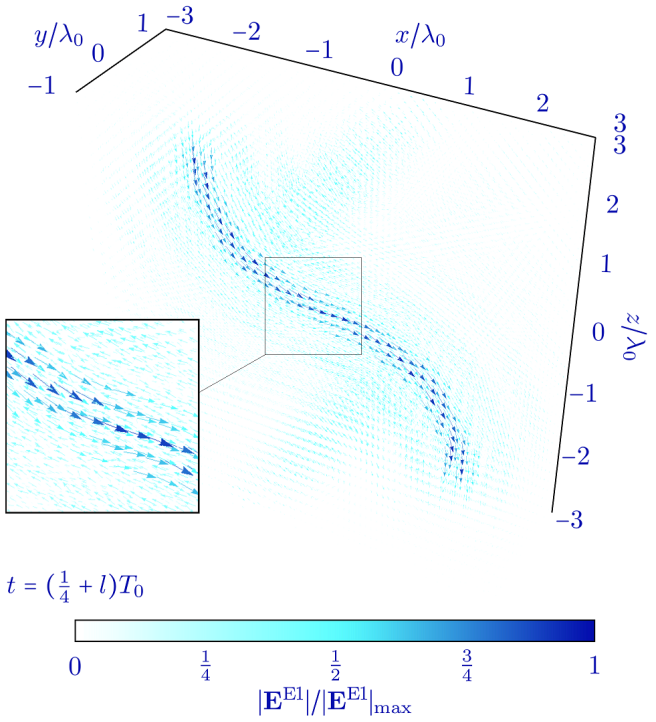

FIG. 8. The electric field of our curved electric line.

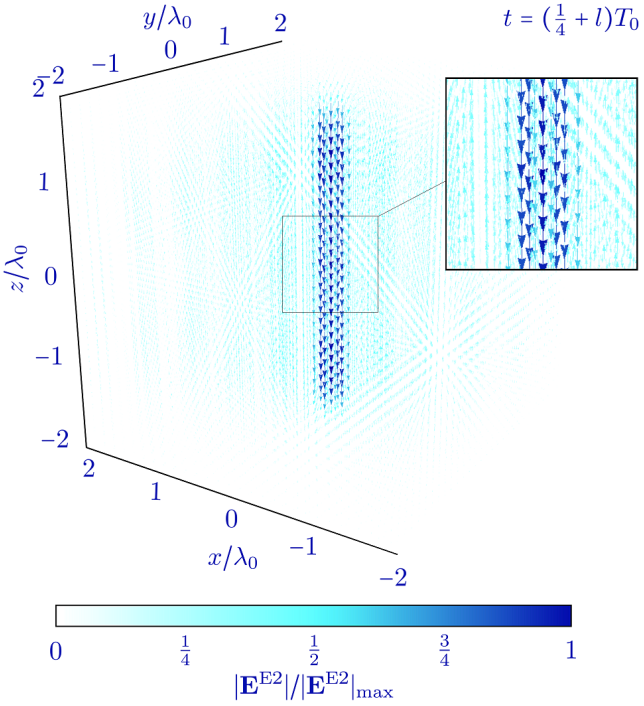

FIG. 9. The electric field of our straight electric line.

F. Knots

Electromagnetic knots described elsewhere were originally referred to as such because "the electromagnetic field as a whole is tied to itself" [8] in that "any pair of magnetic lines or any pair of electric lines are a link" [11]. It is possible to create legitimately knotted rather than linked electric field lines with various forms, within seemingly well localised, monochromatic electromagnetic disturbances, by populating knotted curves with electric globules in a manner akin to that described in §II E for our electric lines. These are knotted electric loops (§II B), of course.

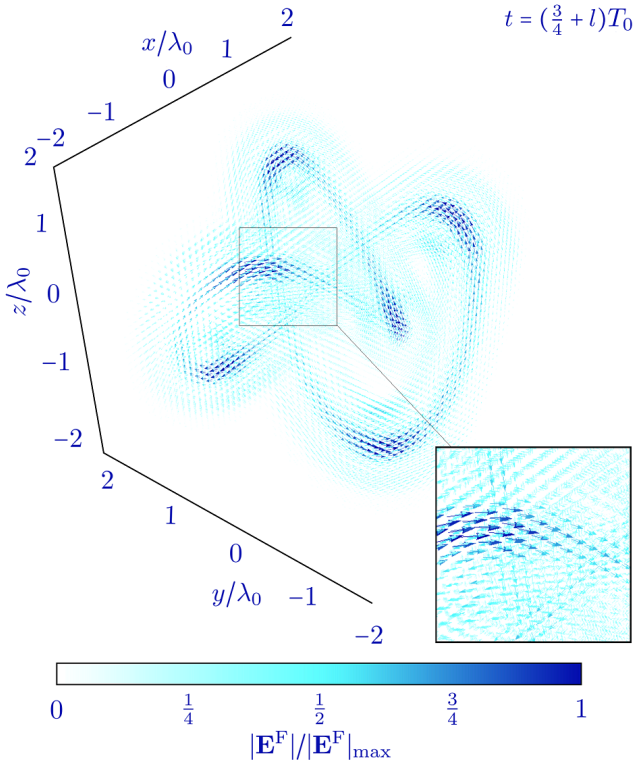

FIG. 10. The electric field of our electric knot. Each of the electric rings comprising the knot has been plotted for $|s_n| \leq \lambda_0$ and $|z_n| \leq \lambda_0$ only, for the sake of clarity and to render the task numerically tractable.

Shown in FIG. 10 for example is the electric field $\mathbf{E}^{\mathrm{F}}$ of the electric trefoil knot specified in §A 6. Our electric knot is chiral [49, 50].

G. Roses

The author is grateful to Stephen M Barnett and Jörg B Götte for their suggestion to superpose an electric ring (§II A) and an electric globule (§II D), which led to the identification of an unusual electromagnetic disturbance that resembles a rose [51]: our electromagnetic rose is similar in construction to our electric ring and our electric globule except that each of its constituent plane waves is circularly polarised [52] as specified in §A 7. Thus

$$\mathbf{E}^{\mathrm{G}} = \frac{1}{\sqrt{2}}(-\sigma\hat{\boldsymbol{\phi}}f + \hat{\boldsymbol{s}}g + \hat{\boldsymbol{z}}h)E_0\cos(\omega_0 t) \qquad (10)$$

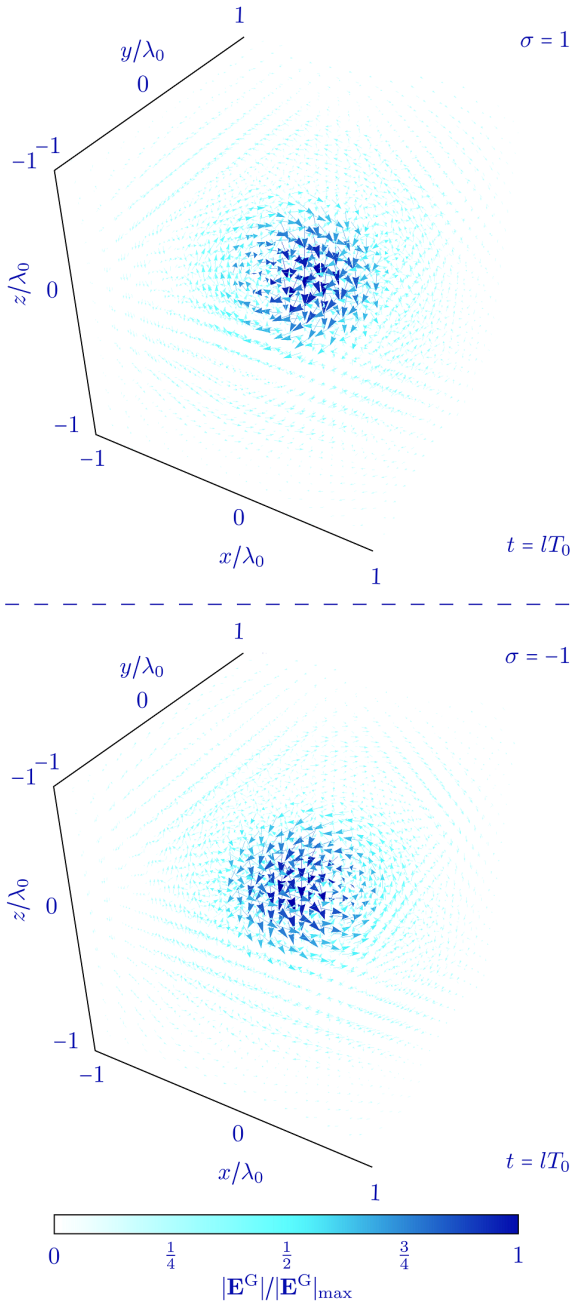

FIG. 11. The electric field of our electromagnetic rose.

with $\sigma = \pm 1$ for left- or right-handed circularly polarised waves in the optics convention [5]. $\mathbf{E}^{\mathrm{G}}$ is depicted in FIG. 11. The magnetic properties of our electromagnetic rose are similar to its electric properties: $\mathbf{B}^{\mathrm{G}} = -\sigma\mathbf{E}^{\mathrm{G}}/c$. Our electromagnetic rose is chiral [49]: $\sigma = 1$ and $\sigma = -1$ give its enantiomorphs.

H. Clouds

Lest we give the impression that an unusual electromagnetic disturbance must have a 'well-defined' form as in a ring, loop, link, globule, line, rose or knot say, we highlight here the possibility of superposing such disturbances in an essentially random manner to construct unusual electromagnetic disturbances that resemble clouds.

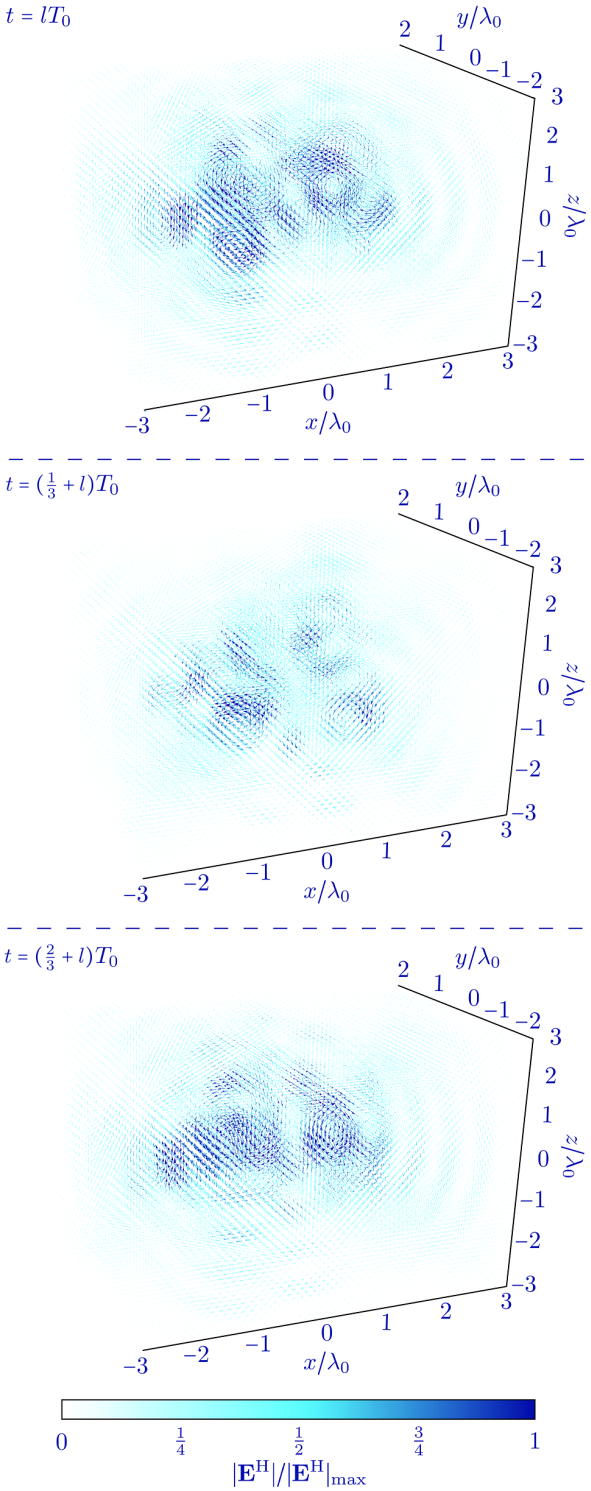

FIG. 12. The electric field of our electromagnetic cloud.

Shown in FIG. 12 for example is the electric field $\mathbf{E}^{\mathrm{H}}$ of the electromagnetic cloud specified in §A 8. Our elec-

tromagnetic cloud can be regarded as a modest superposition of electric rings and electric globules with the same angular frequency but different, randomly chosen orientations, (nearby) positions, amplitudes and phases. The seemingly well localised characters of the rings and globules see the cloud exhibit a seemingly well localised character. The random choices nevertheless give the cloud an amorphous form, with the different phases in particular of the rings and globules giving the cloud a more intricate time dependence within each cycle than the global oscillations exhibited by each of the rings and globules individually.

Let us emphasise that our electromagnetic cloud is not merely a randomly chosen superposition of plane waves. In general such superpositions do not yield well localised electromagnetic disturbances. Rather, our electromagnetic cloud is a randomly chosen superposition of electric rings and electric globules, each of which is a carefully chosen superposition of plane waves.

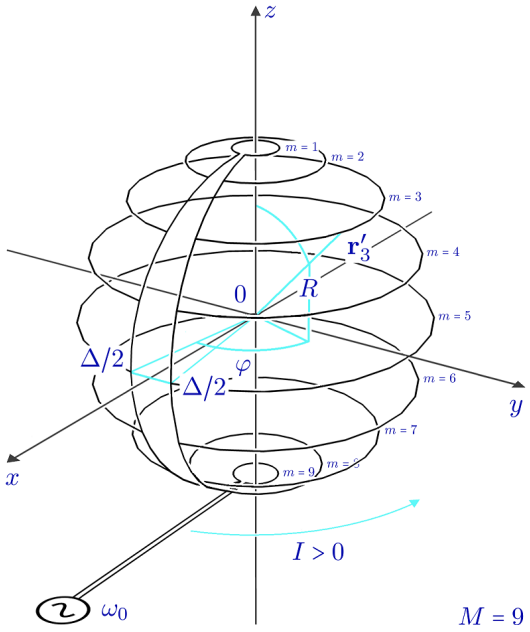

FIG. 13. The basic ingredients of our electric-ring antenna.

I. A note on propagation

Our unusual electromagnetic disturbances are stationary in that the centre of energy of each lies at rest in our chosen frame of reference [38]. They can be set translating through space with any speed $< c$ in any direction, however, by actively boosting them [4, 5, 53], with little additional alteration of their forms for speeds $\ll c$. Each of the plane waves comprising the disturbance propagates with speed c [3–5, 39, 53, 54] whilst differences in the frequencies of these waves give rise to the translation of the disturbance as a whole: the boosted form of a monochromatic electromagnetic disturbance is polychromatic in general, its constituent plane waves having been Doppler shifted [5, 55] by different amounts depending upon their direction of propagation with respect to the direction of the boost.

III. GENERATION

In the present section we briefly consider the generation of unusual electromagnetic disturbances in the laboratory. Different methods of generation will be required depending upon the form of disturbance sought and the frequencies required. We focus here upon the use of an antenna to generate an electric ring (§II A) in the radiowave or microwave domain [39]. Simple elaborations upon our design permit the generation of other unusual electromagnetic disturbances in these domains.

Works to date on electromagnetic knots are largely silent on the question of generation [7–14, 16–22, 24], although some suggestions have been made [15].

Consider a collection of M electrically conducting rings, with each ring concentric with the surface of a sphere of radius R centred upon the origin; θ_m the polar angle of the mth ring ($m \in \{1, \ldots, M\}$); that section of each ring with $\varphi \in (-\Delta/2, \Delta/2)$ removed; the ends of each ring connected to an alternating electric current source of angular frequency ω_0 and

$$I = \Re\left(\tilde{I} \mathrm{e}^{-\mathrm{i}\omega_0 t}\right) \tag{11}$$

the (identical) current in each ring, directed in the $\hat{\boldsymbol{\phi}}$ direction for $I > 0$. See FIG. 13. Ignoring interactions between rings, taking each ring to be of negligible cross-section, neglecting the radiation produced by the elements that connect the rings to the current source and assuming the surrounding medium to be transparent with phase refractive index n_p, we find that the electric field radiated by the rings is essentially

$$\mathbf{E}^{\mathrm{LF}} = \Re\left(\tilde{\mathbf{E}}^{\mathrm{LF}} \mathrm{e}^{-\mathrm{i}\omega_0 t}\right) \tag{12}$$

with

$$\tilde{E}_a^{\mathrm{LF}} = \frac{\mathrm{i}\mu_0 R \omega_0 \tilde{I}}{4\pi} \sum_{m=1}^{M} \int_{\Delta/2}^{2\pi-\Delta/2} \frac{\mathrm{e}^{\mathrm{i}k_0 n_p |\mathbf{r}-\mathbf{r}'_m|}}{|\mathbf{r}-\mathbf{r}'_m|} \sum_{b \in \{x,y,z\}} \tag{13}$$

$$\left[\delta_{ab} \left(1 + \frac{\mathrm{i}}{k_0 n_p |\mathbf{r}-\mathbf{r}'_m|} - \frac{1}{k_0^2 n_p^2 |\mathbf{r}-\mathbf{r}'_m|^2} \right) - \right.$$

$$\left. \frac{(\mathbf{r}-\mathbf{r}'_m)_a (\mathbf{r}-\mathbf{r}'_m)_b}{|\mathbf{r}-\mathbf{r}'_m|^2} \left(1 + \frac{3\,\mathrm{i}}{k_0 n_p |\mathbf{r}-\mathbf{r}'_m|} - \frac{3}{k_0^2 n_p^2 |\mathbf{r}-\mathbf{r}'_m|^2} \right) \right]$$

$$\hat{\varphi}_b \sin\vartheta_m \mathrm{d}\varphi$$

where $a \in \{x, y, z\}$ and

$$\mathbf{r}'_m = \left(\hat{\boldsymbol{x}} \sin\vartheta_m \cos\varphi + \hat{\boldsymbol{y}} \sin\vartheta_m \sin\varphi + \hat{\boldsymbol{z}} \cos\vartheta_m\right) R \tag{14}$$

is the position of an element of the mth ring: $\mathbf{E}^{\mathrm{LF}}$ is a sum over contributions due to such elements, with each element treated as an oscillating electric dipole [4, 5].

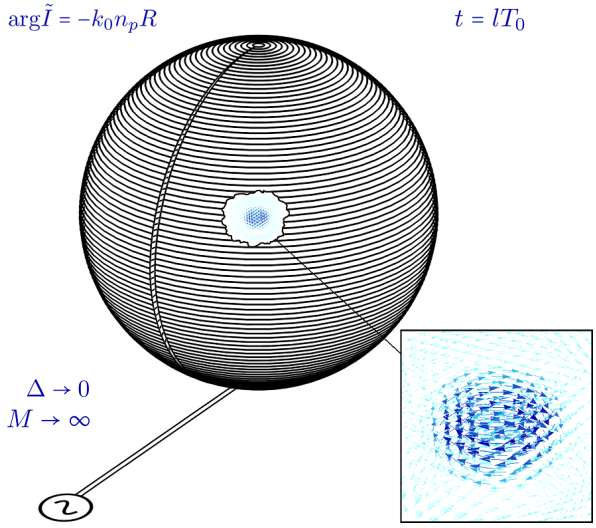

FIG. 14. A schematic of our electric-ring antenna in operation. Part of the antenna has been cut away to reveal the electric ring (§II A) generated by the antenna.

Suppose now that there are many rings and a small gap such that

$$\vartheta_m \to \vartheta, \tag{15}$$

$$\sum_{m=1}^{M} \to \frac{M}{\pi} \int_0^{\pi} \mathrm{d}\vartheta \tag{16}$$

$$\int_{\Delta/2}^{2\pi-\Delta/2} \mathrm{d}\varphi \to \int_0^{2\pi} \mathrm{d}\varphi. \tag{17}$$

For regions within the sphere ($|\mathbf{r}| < R$) that satisfy the far-field condition ($k_0 n_p (R - |\mathbf{r}|) \gg 1$),

$$\tilde{E}_a^{\mathrm{LF}} \approx \frac{\mathrm{i}\mu_0 R \omega_0 \tilde{I} M}{4\pi^2} \int_0^{2\pi}\int_0^{\pi} \frac{\mathrm{e}^{\mathrm{i}k_0 n_p |\mathbf{r}-\mathbf{r}'|}}{|\mathbf{r}-\mathbf{r}'|} \left[\delta_{ab} - \frac{(\mathbf{r}-\mathbf{r}')_a (\mathbf{r}-\mathbf{r}')_b}{|\mathbf{r}-\mathbf{r}'|^2}\right] \hat{\varphi}_b \sin\vartheta \mathrm{d}\vartheta \mathrm{d}\varphi \tag{18}$$

where

$$\mathbf{r}' = (\hat{\boldsymbol{x}} \sin\vartheta\cos\varphi + \hat{\boldsymbol{y}} \sin\vartheta \sin\varphi + \hat{\boldsymbol{z}} \cos\vartheta) R. \tag{19}$$

If, moreover, the distance from the origin is small ($|\mathbf{r}| \ll R$) such that

$$\frac{\mathrm{e}^{\mathrm{i}k_0 n_p |\mathbf{r}-\mathbf{r}'|}}{|\mathbf{r}-\mathbf{r}'|} \approx \frac{\mathrm{e}^{\mathrm{i}k_0 n_p R} \mathrm{e}^{-\mathrm{i}k_0 n_p \mathbf{r}'\cdot\mathbf{r}/R}}{R} \tag{20}$$

$$\left[\delta_{ab} - \frac{(\mathbf{r}-\mathbf{r}')_a (\mathbf{r}-\mathbf{r}')_b}{|\mathbf{r}-\mathbf{r}'|^2}\right] \hat{\varphi}_b \approx \hat{\varphi}_a, \tag{21}$$

this reduces further to

$$\tilde{\mathbf{E}}^{\mathrm{LF}} \approx \hat{\boldsymbol{\phi}} f' \tilde{E}_0' \mathrm{e}^{-\mathrm{i}\omega_0 t} \tag{22}$$

with

$$\tilde{E}_0' = \frac{\mu_0 \omega_0 \tilde{I} M \mathrm{e}^{\mathrm{i}k_0 n_p R}}{2\pi} \tag{23}$$

$$f' = \int_0^{\pi} \mathrm{J}_1(\kappa n_p s) \cos(k_z n_p z) \sin\vartheta \mathrm{d}\vartheta. \tag{24}$$

Thus

$$\mathbf{E}^{\mathrm{LF}} \approx \hat{\boldsymbol{\phi}} f' |\tilde{E}_0'| \cos\left(\omega_0 t - \arg\tilde{E}_0'\right), \tag{25}$$

which is essentially the electric field $\mathbf{E}^{\mathrm{A}}$ of our electric ring: the two coincide precisely in form for $n_p \approx 1$ so that $f' \approx f$, together with a choice of phase for I such that $\tilde{E}_0' \to E_0$ is real. See FIG. 14.

IV. FUTURE RESEARCH

In the present section we highlight some possible directions for future research.

With regards to basic theory:

(i) Unusual electromagnetic disturbances can exhibit a wealth of different topologies and time dependencies, the majority of which remain to be explored.

(ii) The generation of unusual electromagnetic disturbances in the laboratory requires further consideration. It has been suggested to the author by Sonja Franke-Arnold and Neal Radwell that unusual electromagnetic disturbances in the visible domain might be generated by superposing counter-propagating focussed beams of structured light [56–63].

(iii) Exotic media might permit new forms of unusual electromagnetic disturbance and / or aid in the generation of unusual electromagnetic disturbances [64].

With regards to potential applications:

(i) Unusual electromagnetic disturbances might enable new and / or improved forms of display. In particular, unusual electromagnetic disturbances in the visible domain might act as three-dimensional pixels or voxels for a new form of volumetric 3D display, with each voxel rendered visible in air via Rayleigh scattering [65]. Such voxels would be superposable and non-destructive, the small size of each voxel would permit high-resolution volumetric images, different colours of voxel and therefore images could be realised, the non-isotropic radiation profiles of the voxels would permit emulation of occlusion and opacity and there would be no need for mechanical parts within the image volume.

(ii) Unusual electromagnetic disturbances might enable new and / or improved imaging techniques. Our electric globule (§II D) in particular seems to reside within a sphere of sub-wavelength diameter, which is promising and in accord with the discovery that certain beams of structured light can be focussed more tightly than their lesser structured counterparts [62, 63].

(iii) The use of electromagnetic forces to manipulate various forms of matter, including atoms [66–68] and fusion plasmas [69], is well established. The possibilities offered in such contexts by unusual electromagnetic disturbances might be worthy of pursuit. A preliminary examination of the forces exerted upon charged particles by an electromagnetic knot is presented in [17].

With regards to natural occurrence:

(i) Suggestions have already been made that novel electromagnetic disturbances [9, 13], in particular magnetic knots [70–72], might underpin the phenomenon of ball lightning. Perhaps it is worth revisiting these hypotheses given the new ideas introduced in the present paper. Variants of our electric-ring antenna might be employed to ionise the air in unusual geometries and thus help explore such hypotheses in the laboratory [13, 73, 74], for example.

(ii) An unusual electromagnetic disturbance in vacuum might appear essentially invisible when viewed from a sufficient distance, at least as far as its electromagnetic profile is concerned. The disturbance should nevertheless be capable of making its presence known gravitationally, due to its energy-momentum content [75]. It is interesting to imagine an electromagnetic cloud in interstellar space acting as a gravitational lens, for example. Could some component of dark matter [76] be attributed to unusual electromagnetic disturbances and / or analogous features in the gravitational field? The author has found it possible to construct gravitational analogues [77–79] of the unusual electromagnetic disturbances introduced in the present paper, including gravitational clouds.

We will return to these and related ideas elsewhere.

V. ACKNOWLEDGMENTS

This work was supported by the Engineering and Physical Sciences Research Council grant EP/M004694/1. The author thanks Stephen M Barnett, Jörg B Götte, Sonja Franke-Arnold, Neal Radwell, Gergely Ferenczi, Alison M Yao, Aidan S Arnold, Sophie Viaene, Marco Ornigotti and Megan R Paterson for their advice and encouragement.

Appendix A: Recipes

In the present appendix we give explicit recipes for our unusual electromagnetic disturbances.

Any free electromagnetic disturbance can be specified by giving its $\tilde{\mathtt{A}}$ and $\tilde{\mathtt{B}}$, with

$$\mathbf{E} = \Re\left[\int (\hat{\boldsymbol{\vartheta}}\tilde{\mathtt{A}} + \hat{\boldsymbol{\varphi}}\tilde{\mathtt{B}})\mathrm{e}^{\mathrm{i}k(\hat{\boldsymbol{k}}\cdot\mathbf{r}-ct)}\mathrm{d}\mathcal{V}\right] \tag{A1}$$

$$\mathbf{B} = \Re\left[\int \frac{1}{c}(-\hat{\boldsymbol{\vartheta}}\tilde{\mathtt{B}} + \hat{\boldsymbol{\varphi}}\tilde{\mathtt{A}})\mathrm{e}^{\mathrm{i}k(\hat{\boldsymbol{k}}\cdot\mathbf{r}-ct)}\mathrm{d}\mathcal{V}\right] \tag{A2}$$

where $\mathrm{d}\mathcal{V} = k^2 \sin\vartheta \mathrm{d}k\mathrm{d}\vartheta\mathrm{d}\varphi$: $\hat{\boldsymbol{\vartheta}}\tilde{\mathtt{A}} + \hat{\boldsymbol{\varphi}}\tilde{\mathtt{B}} = \mathrm{i}\sqrt{c\hbar k}\boldsymbol{\alpha}(\mathbf{k},0)/\sqrt{4\pi^3\epsilon_0}$ in the notation of [3], for example. We find it convenient to partition this specification further, as follows.

Consider N coordinate systems, with the nth system ($n \in \{1,\ldots,N\}$) described by right-handed Cartesian coordinates x_n, y_n and z_n and orientated such that its associated unit vectors $\hat{\boldsymbol{x}}_n$, $\hat{\boldsymbol{y}}_n$ and $\hat{\boldsymbol{z}}_n$ are given in terms of Euler angles [80] ϕ_n, θ_n and χ_n as

$$\begin{aligned}\hat{\boldsymbol{x}}_n = {}& \hat{\boldsymbol{x}}(\cos\phi_n\cos\theta_n\cos\chi_n - \sin\phi_n\sin\chi_n) \\ & +\hat{\boldsymbol{y}}(\sin\phi_n\cos\theta_n\cos\chi_n + \cos\phi_n\sin\chi_n) \\ & -\hat{\boldsymbol{z}}\sin\theta_n\cos\chi_n,\end{aligned} \tag{A3}$$

$$\begin{aligned}\hat{\boldsymbol{y}}_n = {}& -\hat{\boldsymbol{x}}(\cos\phi_n\cos\theta_n\sin\chi_n + \sin\phi_n\cos\chi_n) \\ & +\hat{\boldsymbol{y}}(-\sin\phi_n\cos\theta_n\sin\chi_n + \cos\phi_n\cos\chi_n) \\ & +\hat{\boldsymbol{z}}\sin\theta_n\sin\chi_n\end{aligned} \tag{A4}$$

$$\hat{\boldsymbol{z}}_n = \hat{\boldsymbol{x}}\cos\phi_n\sin\theta_n + \hat{\boldsymbol{y}}\sin\phi_n\sin\theta_n + \hat{\boldsymbol{z}}\cos\theta_n \tag{A5}$$

whilst its origin is located at $x = X_n$, $y = Y_n$ and $z = Z_n$. Taking

$$\mathbf{E} = \sum_{n=1}^{N} \mathbf{E}_n \tag{A6}$$

$$\mathbf{B} = \sum_{n=1}^{N} \mathbf{B}_n \tag{A7}$$

with

$$\mathbf{E}_n = \Re\left[\int (\hat{\boldsymbol{\vartheta}}_n\tilde{\mathtt{A}}_n + \hat{\boldsymbol{\varphi}}_n\tilde{\mathtt{B}}_n)\mathrm{e}^{\mathrm{i}k_n(\hat{\boldsymbol{k}}_n\cdot\mathbf{r}_n-ct)}\mathrm{d}\mathcal{V}_n\right] \tag{A8}$$

$$\mathbf{B}_n = \Re\left[\int \frac{1}{c}(-\hat{\boldsymbol{\vartheta}}_n\tilde{\mathtt{B}}_n + \hat{\boldsymbol{\varphi}}_n\tilde{\mathtt{A}}_n)\mathrm{e}^{\mathrm{i}k_n(\hat{\boldsymbol{k}}_n\cdot\mathbf{r}_n-ct)}\mathrm{d}\mathcal{V}_n\right] \tag{A9}$$

in an obvious extension of notation, we now specify each of our unusual electromagnetic disturbances by listing values for the ϕ_n, θ_n, χ_n, X_n', Y_n', Z_n', $\tilde{\mathtt{A}}_n'$ and $\tilde{\mathtt{B}}_n'$, with $X_n = X_n'\lambda_0$, $Y_n = Y_n'\lambda_0$, $Z_n = Z_n'\lambda_0$, $\tilde{\mathtt{A}}_n = \tilde{\mathtt{A}}_n' E_0\delta(k - k_0)/2\pi k_0^2$ and $\tilde{\mathtt{B}}_n = \tilde{\mathtt{B}}_n' E_0\delta(k - k_0)/2\pi k_0^2$: the nth building block of the disturbance is thus a superposition of plane electromagnetic waves propagating in every direction, each of equal angular frequency ω_0 and with an equal amplitude, phase at $x = X_n$, $y = Y_n$ and $z = Z_n$ and polarisation defined relative to $\hat{\boldsymbol{\vartheta}}_n$ and $\hat{\boldsymbol{\varphi}}_n$ as determined by $\tilde{\mathtt{A}}_n'$ and $\tilde{\mathtt{B}}_n'$.

1. electric ring

n	ϕ_n	θ_n	χ_n	X_n'	Y_n'	Z_n'	$\tilde{\mathtt{A}}_n'$	$\tilde{\mathtt{B}}_n'$
1	0	0	0	0	0	0	0	–i

gives $\mathbf{E}^{\mathrm{A}}$ and $\mathbf{B}^{\mathrm{A}}$: our electric ring (§II A).

2. electric loop

n	ϕ_n	θ_n	χ_n	X'_n	Y'_n	Z'_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0	0	0	0	$5\sqrt{3}d/2$	0	0	–i
2	0	0	0	$-d$	$3\sqrt{3}d/2$	0	0	–i
3	0	0	0	d	$3\sqrt{3}d/2$	0	0	–i
4	0	0	0	$-2d$	$\sqrt{3}d/2$	0	0	–i
5	0	0	0	0	$\sqrt{3}d/2$	0	0	–i
6	0	0	0	$2d$	$\sqrt{3}d/2$	0	0	–i
7	0	0	0	$-3d$	$-\sqrt{3}d/2$	0	0	–i
8	0	0	0	$-d$	$-\sqrt{3}d/2$	0	0	–i
9	0	0	0	d	$-\sqrt{3}d/2$	0	0	–i
10	0	0	0	$3d$	$-\sqrt{3}d/2$	0	0	–i
11	0	0	0	$-4d$	$-3\sqrt{3}d/2$	0	0	–i
12	0	0	0	$-2d$	$-3\sqrt{3}d/2$	0	0	–i
13	0	0	0	0	$-3\sqrt{3}d/2$	0	0	–i
14	0	0	0	$2d$	$-3\sqrt{3}d/2$	0	0	–i
15	0	0	0	$4d$	$-3\sqrt{3}d/2$	0	0	–i
16	0	0	0	$-5d$	$-5\sqrt{3}d/2$	0	0	–i
17	0	0	0	$-3d$	$-5\sqrt{3}d/2$	0	0	–i
18	0	0	0	$-d$	$-5\sqrt{3}d/2$	0	0	–i
19	0	0	0	d	$-5\sqrt{3}d/2$	0	0	–i
20	0	0	0	$3d$	$-5\sqrt{3}d/2$	0	0	–i
21	0	0	0	$5d$	$-5\sqrt{3}d/2$	0	0	–i

where $d = 0.33$ gives $\mathbf{E}^{\mathrm{B}}$ and $\mathbf{B}^{\mathrm{B}}$: our electric loop (§II B).

3. electric link

n	ϕ_n	θ_n	χ_n	X'_n	Y'_n	Z'_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0	0	0	$-3d/2$	$-(3d+D)/2$	0	0	–i
2	0	0	0	$-3d/2$	$-(d+D)/2$	0	0	–i
3	0	0	0	$-3d/2$	$(d-D)/2$	0	0	–i
4	0	0	0	$-3d/2$	$(3d-D)/2$	0	0	–i
5	0	0	0	$-d/2$	$-(3d+D)/2$	0	0	–i
6	0	0	0	$-d/2$	$-(d+D)/2$	0	0	–i
7	0	0	0	$-d/2$	$(d-D)/2$	0	0	–i
8	0	0	0	$-d/2$	$(3d-D)/2$	0	0	–i
9	0	0	0	$d/2$	$-(3d+D)/2$	0	0	–i
10	0	0	0	$d/2$	$-(d+D)/2$	0	0	–i
11	0	0	0	$d/2$	$(d-D)/2$	0	0	–i
12	0	0	0	$d/2$	$(3d-D)/2$	0	0	–i
13	0	0	0	$3d/2$	$-(3d+D)/2$	0	0	–i
14	0	0	0	$3d/2$	$-(d+D)/2$	0	0	–i
15	0	0	0	$3d/2$	$(d-D)/2$	0	0	–i
16	0	0	0	$3d/2$	$(3d-D)/2$	0	0	–i
17	0	$\pi/2$	0	0	$-(3d-D)/2$	$-3d/2$	0	–i
18	0	$\pi/2$	0	0	$-(3d-D)/2$	$-d/2$	0	–i
19	0	$\pi/2$	0	0	$-(3d-D)/2$	$d/2$	0	–i
20	0	$\pi/2$	0	0	$-(3d-D)/2$	$3d/2$	0	–i
21	0	$\pi/2$	0	0	$-(d-D)/2$	$-3d/2$	0	–i
22	0	$\pi/2$	0	0	$-(d-D)/2$	$-d/2$	0	–i
23	0	$\pi/2$	0	0	$-(d-D)/2$	$d/2$	0	–i
24	0	$\pi/2$	0	0	$-(d-D)/2$	$3d/2$	0	–i
25	0	$\pi/2$	0	0	$(d+D)/2$	$-3d/2$	0	–i
26	0	$\pi/2$	0	0	$(d+D)/2$	$-d/2$	0	–i
27	0	$\pi/2$	0	0	$(d+D)/2$	$d/2$	0	–i
28	0	$\pi/2$	0	0	$(d+D)/2$	$3d/2$	0	–i
29	0	$\pi/2$	0	0	$(3d+D)/2$	$-3d/2$	0	–i
30	0	$\pi/2$	0	0	$(3d+D)/2$	$-d/2$	0	–i
31	0	$\pi/2$	0	0	$(3d+D)/2$	$d/2$	0	–i
32	0	$\pi/2$	0	0	$(3d+D)/2$	$3d/2$	0	–i

where $d = 0.75$ and $D = 1.50$ gives $\mathbf{E}^{\mathrm{C}}$ and $\mathbf{B}^{\mathrm{C}}$: our electric link (§II C).

4. electric globule

n	ϕ_n	θ_n	χ_n	X_n	Y_n	Z_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0	0	0	0	0	0	i	0

gives $\mathbf{E}^{\mathrm{D}}$ and $\mathbf{B}^{\mathrm{D}}$: our electric globule (§II D).

5. electric lines

n	ϕ_n	θ_n	χ_n	X'_n	Y'_n	Z'_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	π	0	0	dc_1	0	$d(s_1-1)$	i	0
2	π	$\delta\theta$	0	dc_2	0	$d(s_2-1)$	i	0
3	π	$2\delta\theta$	0	dc_3	0	$d(s_3-1)$	i	0
4	π	$3\delta\theta$	0	dc_4	0	$d(s_4-1)$	i	0
5	π	$4\delta\theta$	0	dc_5	0	$d(s_5-1)$	i	0
6	π	$5\delta\theta$	0	dc_6	0	$d(s_6-1)$	i	0
7	π	$6\delta\theta$	0	dc_7	0	$d(s_7-1)$	i	0
8	π	$7\delta\theta$	0	dc_8	0	$d(s_8-1)$	i	0
9	π	π	0	dc_9	0	$d(s_9+1)$	i	0
10	π	$\pi+\delta\theta$	0	dc_{10}	0	$d(s_{10}+1)$	i	0
11	π	$\pi+2\delta\theta$	0	dc_{11}	0	$d(s_{11}+1)$	i	0
12	π	$\pi+3\delta\theta$	0	dc_{12}	0	$d(s_{12}+1)$	i	0
13	π	$\pi+4\delta\theta$	0	dc_{13}	0	$d(s_{13}+1)$	i	0
14	π	$\pi+5\delta\theta$	0	dc_{14}	0	$d(s_{14}+1)$	i	0
15	π	$\pi+6\delta\theta$	0	dc_{15}	0	$d(s_{15}+1)$	i	0

with $\delta\theta = \pi/14$, $c_n = \cos\theta_n$ and $s_n = \sin\theta_n$ where $d = 2.00$ gives $\mathbf{E}^{\mathrm{E1}}$ and $\mathbf{B}^{\mathrm{E1}}$: our curved electric line (§II E).

n	ϕ_n	θ_n	χ_n	X_n	Y_n	Z_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0	0	0	0	0	$-7d$	i	0
2	0	0	0	0	0	$-6d$	i	0
3	0	0	0	0	0	$-5d$	i	0
4	0	0	0	0	0	$-4d$	i	0
5	0	0	0	0	0	$-3d$	i	0
6	0	0	0	0	0	$-2d$	i	0
7	0	0	0	0	0	$-d$	i	0
8	0	0	0	0	0	0	i	0
9	0	0	0	0	0	d	i	0
10	0	0	0	0	0	$2d$	i	0
11	0	0	0	0	0	$3d$	i	0
12	0	0	0	0	0	$4d$	i	0
13	0	0	0	0	0	$5d$	i	0
14	0	0	0	0	0	$6d$	i	0
15	0	0	0	0	0	$7d$	i	0

where $d = 0.25$ gives $\mathbf{E}^{\mathrm{E2}}$ and $\mathbf{B}^{\mathrm{E2}}$: our straight electric line (§II E).

6. electric knot

$$\begin{aligned}
\phi_n &= \tan^{-1}(\hat{v}_y/\hat{v}_x)\\
\theta_n &= \arccos^{-1}\hat{v}_z\\
\chi_n &= 0\\
X'_n &= d\,\{\sin[\pi(n-1)/40] + 2\sin[\pi(n-1)/20]\}\\
Y'_n &= d\,\{\cos[\pi(n-1)/40] - 2\cos[\pi(n-1)/20]\}\\
Z'_n &= -2d\sin[3\pi(n-1)/40]\\
\tilde{\mathtt{A}}'_n &= \mathrm{i}\\
\tilde{\mathtt{B}}'_n &= 0
\end{aligned}$$

where

$$\hat{v}_x = \frac{\{\cos[\pi(n-1)/40] + 4\cos[\pi(n-1)/20]\}}{\sqrt{35 + 8\cos[3\pi(n-1)/40] + 18\cos[3\pi(n-1)/20]}}$$

$$\hat{v}_y = \frac{\{-\sin[\pi(n-1)/40] + 4\sin[\pi(n-1)/20]\}}{\sqrt{35 + 8\cos[3\pi(n-1)/40] + 18\cos[3\pi(n-1)/20]}}$$

$$\hat{v}_z = -\frac{6\cos[3\pi(n-1)/40]}{\sqrt{35 + 8\cos[3\pi(n-1)/40] + 18\cos[3\pi(n-1)/20]}}$$

and $d = 0.90$ for $N = 80$ gives $\mathbf{E}^{\mathrm{F}}$ and $\mathbf{B}^{\mathrm{F}}$: our electric knot (§II F).

7. electromagnetic rose

n	ϕ_n	θ_n	χ_n	X_n	Y_n	Z_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0	0	0	0	0	0	$\frac{1}{\sqrt{2}}$	$\frac{\mathrm{i}\sigma}{\sqrt{2}}$

with $\sigma = \pm 1$ gives $\mathbf{E}^{\mathrm{G}}$ and $\mathbf{B}^{\mathrm{G}}$: our electromagnetic rose (§II G).

8. electromagnetic cloud

n	ϕ_n	θ_n	χ_n	X'_n	Y'_n	Z'_n	$\tilde{\mathtt{A}}'_n$	$\tilde{\mathtt{B}}'_n$
1	0.2	1.6	5.6	0.00	0.00	0.69	$0.1\mathrm{e}^{3.1\mathrm{i}}$	$0.9\mathrm{e}^{4.7\mathrm{i}}$
2	1.4	0.7	6.1	−0.64	0.15	0.15	$0.6\mathrm{e}^{1.1\mathrm{i}}$	$0.2\mathrm{e}^{1.1\mathrm{i}}$
3	4.9	0.0	0.3	−1.63	0.57	−0.30	$1.2\mathrm{e}^{0.6\mathrm{i}}$	$0.7\mathrm{e}^{0.6\mathrm{i}}$
4	3.0	1.2	2.4	−0.91	0.21	−0.15	$0.1\mathrm{e}^{4.1\mathrm{i}}$	$0.5\mathrm{e}^{5.1\mathrm{i}}$
5	5.2	3.1	5.1	−0.82	−0.18	−0.48	$0.7\mathrm{e}^{2.9\mathrm{i}}$	$1.2\mathrm{e}^{4.1\mathrm{i}}$
6	0.8	2.8	3.8	−1.30	−0.09	0.36	$0.5\mathrm{e}^{0.8\mathrm{i}}$	$1.0\mathrm{e}^{3.1\mathrm{i}}$
7	2.2	2.3	4.2	−0.55	−0.42	0.12	$0.9\mathrm{e}^{1.2\mathrm{i}}$	$0.8\mathrm{e}^{2.5\mathrm{i}}$
8	3.7	0.8	1.3	−1.27	−0.60	0.39	$1.1\mathrm{e}^{0.1\mathrm{i}}$	$1.1\mathrm{e}^{6.0\mathrm{i}}$
9	2.4	1.4	4.4	−0.94	0.30	−0.33	$0.2\mathrm{e}^{5.4\mathrm{i}}$	$0.4\mathrm{e}^{0.9\mathrm{i}}$
10	4.3	1.9	0.9	−0.46	0.45	0.06	$0.3\mathrm{e}^{0.2\mathrm{i}}$	$0.2\mathrm{e}^{1.1\mathrm{i}}$
11	1.2	2.8	4.5	0.70	0.15	0.66	$0.8\mathrm{e}^{4.1\mathrm{i}}$	$0.4\mathrm{e}^{3.2\mathrm{i}}$
12	0.3	1.6	1.1	0.64	−0.18	0.24	$0.5\mathrm{e}^{2.5\mathrm{i}}$	$1.0\mathrm{e}^{2.3\mathrm{i}}$
13	1.8	1.3	5.3	1.24	0.48	0.30	$0.6\mathrm{e}^{1.7\mathrm{i}}$	$0.4\mathrm{e}^{2.6\mathrm{i}}$
14	4.5	0.9	6.1	1.15	0.12	−0.18	$1.1\mathrm{e}^{3.5\mathrm{i}}$	$0.9\mathrm{e}^{6.1\mathrm{i}}$
15	6.0	0.1	2.3	1.03	−0.63	−0.39	$0.9\mathrm{e}^{2.4\mathrm{i}}$	$0.1\mathrm{e}^{3.1\mathrm{i}}$
16	0.4	1.8	2.2	0.94	−0.24	0.51	$0.6\mathrm{e}^{0.2\mathrm{i}}$	$0.2\mathrm{e}^{6.2\mathrm{i}}$
17	1.4	3.1	3.2	1.48	0.39	−0.21	$0.4\mathrm{e}^{0.5\mathrm{i}}$	$1.1\mathrm{e}^{5.1\mathrm{i}}$
18	3.2	2.8	1.8	1.12	0.51	−0.09	$0.1\mathrm{e}^{5.5\mathrm{i}}$	$0.6\mathrm{e}^{1.7\mathrm{i}}$
19	1.9	1.5	3.6	0.52	−0.30	0.45	$0.2\mathrm{e}^{5.3\mathrm{i}}$	$0.5\mathrm{e}^{0.5\mathrm{i}}$
20	5.1	2.4	0.9	0.64	0.21	0.66	$0.8\mathrm{e}^{0.5\mathrm{i}}$	$1.1\mathrm{e}^{1.4\mathrm{i}}$

gives $\mathbf{E}^{\mathrm{H}}$ and $\mathbf{B}^{\mathrm{H}}$: our electromagnetic cloud (§II H).

[1] Throughout the present paper we work in the classical domain, imagining ourselves to be in an inertial frame of reference. x, y and z are right-handed Cartesian coordinates, with associated unit vectors $\hat{\boldsymbol{x}}$, $\hat{\boldsymbol{y}}$ and $\hat{\boldsymbol{z}}$; s, ϕ and z are cylindrical coordinates, with associated unit vectors $\hat{\boldsymbol{s}}$, $\hat{\boldsymbol{\phi}}$ and $\hat{\boldsymbol{z}}$; $\mathbf{r}$ is the position; $\boldsymbol{\nabla}$ is the gradient operator with respect to $\mathbf{r}$; k, ϑ and φ are spherical coordinates in reciprocal space, with associated unit vectors $\hat{\boldsymbol{k}}$, $\hat{\boldsymbol{\vartheta}}$ and $\hat{\boldsymbol{\varphi}}$; t is the time; an overdot indicates a partial derivative with respect to t; ϵ_0 is the electric constant; μ_0 is the magnetic constant; $c = 1/\sqrt{\epsilon_0\mu_0}$ is the speed of light; $\hbar$ is the reduced Planck constant; E_0 is an electric field strength; $\omega_0 = 2\pi/T_0 = ck_0 = 2\pi c/\lambda_0$ is an angular frequency; l and l' are integers; $\mathrm{J}_\alpha(X)$ is the Bessel function of the first kind of order α; δ_{ab} is the Kronecker delta function; $\delta(X)$ is the Dirac delta function and $\tan^{-1}(X)$ is the four-quadrant inverse tangent function.

[2] J C Maxwell 1873 *A Treatise on Electricity and Magnetism* (Clarendon Press)

[3] C Cohen-Tannoudji, J Dupont-Roc and G Grynberg 1989 *Photons and Atoms: Introduction to Quantum Electrodynamics* (Wiley)

[4] D J Griffiths 1999 *Introduction to Electrodynamics* (Pearson Education)

[5] J D Jackson 1999 *Classical Electrodynamics* (Wiley)

[6] V J Katz 1979 The history of Stokes' theorem *Math. Mag.* **52** 146–156

[7] A F Rañada 1989 A topological theory of the free electromagnetic field *Lett. Math. Phys.* **18** 97–106

[8] A F Rañada 1990 Knotted solutions of the Maxwell equations in vacuum *J. Phys. A: Math. Gen.* **23** L815–L820

[9] G Arnhoff 1992 Is there yet an explanation of ball lightning? *Eur. Trans. Electr. Power Eng.* **2** 137–142

[10] A F Rañada 1992 Topological electromagnetism *J. Phys. A: Math. Gen.* **25** 1621–1641

[11] A F Rañada 1995 Electromagnetic knots *Phys. Lett. A* **202** 337-342

[12] A F Rañada and J L Trueba 1997 Two properties of electromagnetic knots *Phys. Lett. A* **232** 25–33

[13] A E Chubykalo and A Espinoza 2002 Unusual formations of the free electromagnetic field in vacuum *J. Phys. A: Math. Gen.* **35** 8043–8053

[14] I Bialynicki-Birula 2004 Electromagnetic vortex lines riding atop null solutions of the Maxwell equations *J. Opt. A: Pure Appl. Opt.* **6** S181–S183

[15] W T M Irvine and D Bouwmeester 2008 Linked and knotted beams of light *Nat. Phys.* **4** 716–720

[16] I M Besieris and A M Shaarawi 2009 Hopf-Ranãda linked and knotted light beam solution viewed as a null electromagnetic field *Opt. Lett.* **34** 3887–3889

[17] M Arrayás and J L Trueba 2010 Motion of charged particles in a knotted electromagnetic field *J. Phys. A: Math. Theor.* **43** 235401

[18] W T M Irvine 2010 Linked and knotted beams of light, conservation of helicity and the flow of null electromagnetic fields *J. Phys. A: Math. Theor.* **43** 385203

[19] J W Dalhuisen and D Bouwmeester 2012 Twistors and electromagnetic knots *J. Phys. A: Math. Theor.* **45** 135201

[20] H Kedia, I Bialynicki-Birula, D Peralta-Salas and W T M Irvine 2013 Tying knots in light fields *Phys. Rev. Lett.* **111** 150404

[21] M Arrayás and J L Trueba 2015 A class of non-null toroidal electromagnetic fields and its relation to the model of electromagnetic knots *J. Phys. A: Math. Theor.* **48** 025203

[22] C Hoyos, N Sircar and J Sonnenschein 2015 New knotted solutions of Maxwell's equations *J. Phys. A: Math. Theor.* **48** 255204

[23] H Kedia, D Foster, M R Dennis and W T M Irvine 2016 Weaving knotted vector fields with tunable helicity *Phys. Rev. Lett.* **117** 274501

[24] G Smith and P Strange 2017 Properties of null knotted solutions to Maxwell's equations *Proc. SPIE* 10120, Complex Light and Optical Forces XI, 101201C-1

[25] J F Nye and M V Berry 1974 Dislocations in wave trains *Proc. Roy. Soc. Lond. A* **336** 165–190

[26] M V Berry and M R Dennis 2001 Knotted and linked phase singularities in monochromatic waves *Proc. Roy. Soc. Lond. A* **457** 2251–2263

[27] J Leach, M R Dennis, J Courtial and M J Padgett 2004 Knotted threads of darkness *Nature* **432** 165–165

[28] J V Hajnal 1987 Singularities in the transverse fields of electromagnetic waves. I. Theory *Proc. Roy. Soc. Lond. A* **414** 433–446

[29] J V Hajnal 1987 Singularities in the transverse fields of electromagnetic waves. II. Observations on the electric field *Proc. Roy. Soc. Lond. A* **414** 447–468

[30] M V Berry and M R Dennis 2001 Polarization singularities in isotropic random vector waves *Proc. Roy. Soc. Lond. A* **457** 141–155

[31] T Bauer *et al.* 2015 Observation of optical polarization Möbius strips *Science* **347** 964–966

[32] B Acharya *et al.* 2016 Search for magnetic monopoles with the MoEDAL prototype trapping detector in 8 TeV proton-proton collisions at the LHC *J. High Energy Phys.* **2016** 67

[33] O Heaviside 1892 On the forces, stresses and fluxes of energy in the electromagnetic field *Phil. Trans. Roy. Soc. Lond. A* **183** 423–480

[34] J Larmor 1897 Dynamical theory of the electric and luminiferous medium. Part III. Relations with material media *Phil. Trans. Roy. Soc. Lond. A* **190** 205–493

[35] R P Cameron and S M Barnett 2012 Electric-magnetic symmetry and Noether's theorem *New J. Phys.* **14** 123019

[36] K Y Bliokh, A Y Bekshaev and F Nori 2013 Dual electromagnetism: helicity, spin, momentum and angular momentum *New J. Phys.* **15** 033026

[37] The total energy of a seemingly well localised electromagnetic disturbance is not necessarily finite. Good approximations to our unusual electromagnetic disturbances in finite regions of space can nevertheless be generated in the laboratory, as illustrated for our electric ring (§II A) in §III.

[38] E Bessel-Hagen 1921 Über die Erhaltungssätze der Elektrodynamik *Mathematische Annalen* **84** 258–76

[39] J C Maxwell 1865 A dynamical theory of the electromagnetic field *Phil. Trans. Roy. Soc. Lond.* **155** 459–451

[40] P Villard 1900 Sur la réflexion et la réfraction des rayons cathodiques et des rayons déviables du radium *Comptes rendus hebdomadaires des séances de l'Académie des sci-*

ences **130** 1010–1012
[41] P Villard 1900 Sur le rayonnement du radium *Comptes rendus hebdomadaires des séances de l'Académie des sciences* **130** 1178–1179
[42] E Rutherford 1903 The magnetic and electric deviation of the easily absorbed rays from radium *Phil. Mag.* **5** 177–187
[43] W Herschel 1800 Investigation of the powers of the prismatic colours to heat and illuminate objects; with remarks, that prove the different refrangibility of radiant heat. To which is added, an inquiry into the method of viewing the sun advantageously, with telescopes of large apertures and high magnifying powers *Phil. Trans. Roy. Soc. Lond.* **90** 255–283
[44] W Herschel 1800 Experiments on the refrangibility of the invisible rays of the sun *Phil. Trans. Roy. Soc. Lond.* **90** 284–292
[45] W Herschel 1800 Experiments on the solar, and on the terrestrial rays that occasion heat; with a comparative view of the laws to which light and heat, or rather the rays which occasion them, are subject, in order to determine whether they are the same, or different *Phil. Trans. Roy. Soc. Lond.* **90** 293–326 & 437–538
[46] O C Marsh 1877 A new order of extinct Reptilia (*Stegosauria*) from the Jurassic of the Rocky Mountains *Am. J. Sci.* **3** 513–514
[47] W C Röntgen 1895 Über eine neue Art von Strahlen *Sitzungsberichten der Physikalisch-Medicinsichen Gesellschaft zu Würzburg* **9** 132–141
[48] In the present paper 'electric loop' is not synonymous with 'looped electric field line', nor is 'electric line' synonymous with 'electric field line'.
[49] Lord Kelvin 1894 The molecular tactics of a crystal *J. Oxford Univ. Junior Scientific Club* **183** 3–57
[50] The construction of a right-handed electric trefoil knot is left as an exercise for the reader.
[51] It has been suggested to the author by Gergely Ferenczi that the form of our electromagnetic rose resembles that of certain tomato roses.
[52] A Fresnel 1832 La loi de modifications que la réflexion imprime a la lumière polarisée *Mem. Acad. Sci. Inst. France* **11** 393–433
[53] A Einstein 1905 Zur Elektrodynamik bewegter Körper *Annalen der Physik* **17** 891–921
[54] D Giovannini *et al.* 2015 Spatially structured photons that travel in free space slower than the speed of light *Science* **347** 857–860
[55] C Doppler 1842 *Über das farbige Licht der Doppelsterne und einiger anderer Gestirne des Himmels* (Borrosch und André)
[56] D L Andrews, E J Galvez and J Glückstad 2015 Special section guest editorial: complex light *Opt. Eng.* **54** 111301
[57] N Radwell, R D Hawley, J B Götte and S Franke-Arnold 2016 Achromatic vector vortex beams from a glass cone *Nat. Comm.* **7** 10564
[58] M Ornigotti, C Conti and A Szameit 2016 Cylindrically polarized nondiffracting optical pulses *arXiv:1602.03317v1*
[59] V Chille *et al.* 2016 Experimental generation of amplitude squeezed vector beams *Opt. Express* **24** 12385–12394
[60] N Radwell, R D Hawley, J B Goette and S Franke-Arnold 2016 Radial poarisation and more from a glass cone *Frontiers in Optics 2016, FTh5B.3*
[61] H Rubinsztein-Dunlop *et al.* 2017 Roadmap on structured light *J. Opt.* **19** 013001
[62] S Quabis, R Dorn, M Eberler, O Glöckl and G Leuchs 2000 Focussing light to a tighter spot *Opt. Comm.* **179** 1–7
[63] R Dorn, S Quabis and G Leuchs 2003 Sharper focus for a radially polarized light beam *Phys. Rev. Lett.* **91** 233901
[64] F Bouchard *et al.* 2016 Polarization shaping for control of nonlinear propagation *Phys. Rev. Lett.* **117** 233903
[65] J Strutt 1871 On the scattering of light by small particles *Phil. Mag.* **41** 447–454
[66] A Ashkin 1970 Acceleration and trapping of particles by radiation pressure *Phys. Rev. Lett.* **24** 156–159
[67] N Radwell, G walker and S Franke-Arnold 2013 Cold-atom densities of more than 10^{12}cm^{-3} in a holographically shaped dark spontaneous-force optical trap *Phys. Rev. A* **88** 043409
[68] V E Lembessis and M Babiker 2016 Mechanical effects on atoms interacting with highly twisted Laguerre-Gaussian light *Phys. Rev. A* **94** 043854
[69] T Klinger *et al.* 2017 Performance and properties of the first plasmas of Wendelstein 7-X *Plasma Phys. Control. Fusion* **59** 014018
[70] A F Rañada and J L Trueba 1996 Ball lightning an electromagnetic knot? *Nature* **383** 32–32
[71] A F Rañada, M Soler and J L Trueba 1998 A model of ball lightning as a magnetic knot with linked streamers *J. Geophys. Res.* **103** 23309–23313
[72] A F Rañada, M Soler and J L Trueba 2000 Ball lightning as a force-free magnetic knot *Phys. Rev. E* **62** 7181–7190
[73] Y H Ohtsuki and H Ofuruton 1991 Plasma fireballs formed by microwave interference in air *Nature* **350** 139–141
[74] I Alexeff and M Rader 1995 Possible precursors of ball lightning - observation of closed loops in high-voltage discharges *Fusion Sci. Technol.* **27** 271–273
[75] A Einstein 1916 *Annalen der Physik* **49** 769–822
[76] K J Cornelius 1922 First attempt at a theory of the arrangement and motion of the sidereal system *Astrophys. J.* **55** 302–327
[77] J M Weisberg, J H Taylor and L A Fowler 1981 Gravitational waves from an orbiting pulsar *Sci. Am.* **245** 74–82
[78] S M Barnett 2014 Maxwellian theory of gravitational waves and their mechanical properties *New J. Phys.* **16** 023027
[79] B P Abbott *et al.* 2016 Observation of gravitational waves from a binary black hole merger *Phys. Rev. Lett.* **116** 061102
[80] P R Bunker and P Jensen 2005 *Fundamental of Molecular Symmetry* (Institute of Physics Publishing)